

# High-performance SFW 100 Suction / Filter Cart



## Advantages:

- Extends the service life of coolants
- Reduces machines' downtime
- Reduces costs
- Enables chip removal in the coolant
- Handy and compact

## The fast machine-cleaning and coolant filter device

### Economical

The SFW 100 suction / filter cart reduces the cleaning time of your machines to just a few minutes, cuts your costs by filtering and thus increases the coolant's service life. It enables the retrieval of high-quality chips from the coolant.

### Easy to operate

No job is too difficult for the new SFW 100 suction / filter cart. Its handling is effortless and it is easy to move - even in the most narrow machine passage-ways.

### Fast

Thanks to its design, you can even rely on the SFW 100 suction / filter cart in the most extreme conditions. It is also surprisingly speedy. It sucks 100 litres of coolant in less than 16 seconds and also the most coarse chips.

### Robust

The SFW 100 suction / filter cart was built by practitioners for practitioners. Three motors provide excellent an throughput. Low-maintenance design, solids and liquids do not come into contact with the pump unit.





**Technical data:**

**Description**

High-performance / suction device for filtering and retrieval of coolants, as well as for cleaning machine tools.

**Design**

Welded 100 litre tank, can be easily removed from the **robust chassis**, with two 355mm wheels. Suction hose holder in the **steel design**. Oil-resistant paint.

**Dimensions**

Length : approx. 1240 mm  
 Width : approx. 680 mm  
 Height : approx. 1310 mm.  
 Net weigh approx 95 kg, including standard nozzles

**Motors**

3 kW 415v, air-cooled bypass motors. The engines only draw air and a floating ball protects them from moisture permeation.

**Filter unit**


Perforated 35 l filter basket, replaceable filter bags made from nylon or non-woven fabric included. The filter bags can be rinsed out and used again.

**Standard accessories**

- Suction tube
- rubber suction nozzle
- Tube adapter
- floor suction nozzle
- extension pipe

**Performance**

Water column (WC)	3,800 mm
Air discharge flow	3000 l/min
Water throughput:	330 l/min
Return capacity	130 l/min

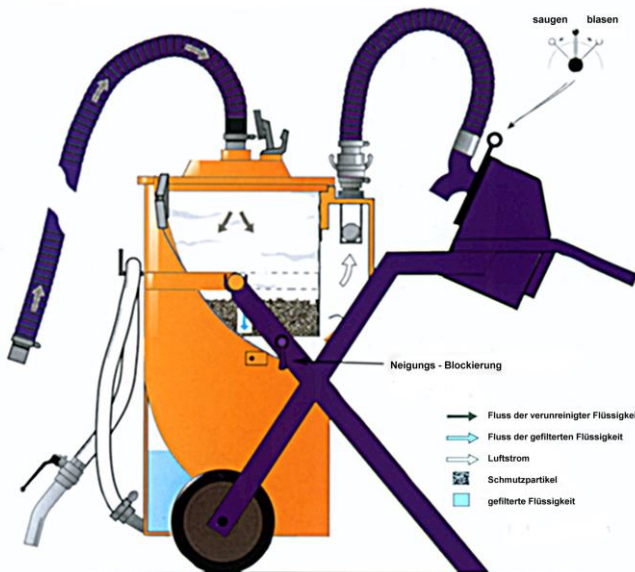

I am interested in:

an appointment and demonstration

non-binding quote

Company .....

Contact person .....

Address ..... Post code / Town .....